



Photo Parameters

Flux = 215.2 lm Eff. : 46.7 lm/W CRI=93

Polar curve / Diagrama Polar

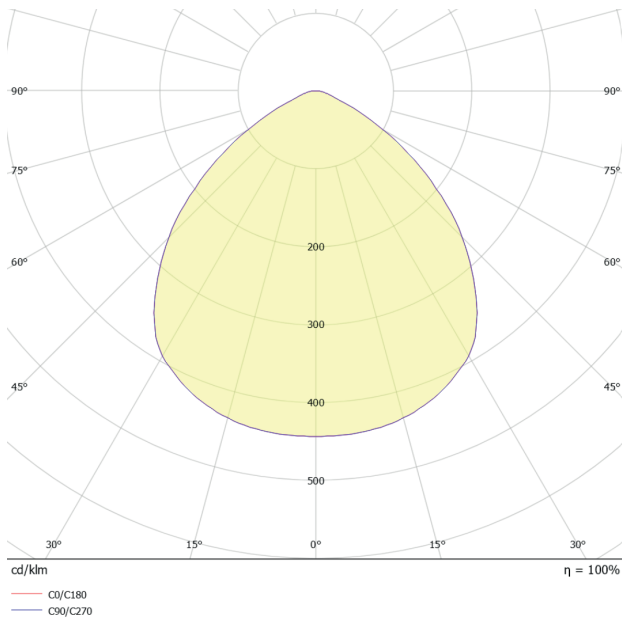

Conic curve / Diagrama Cónico

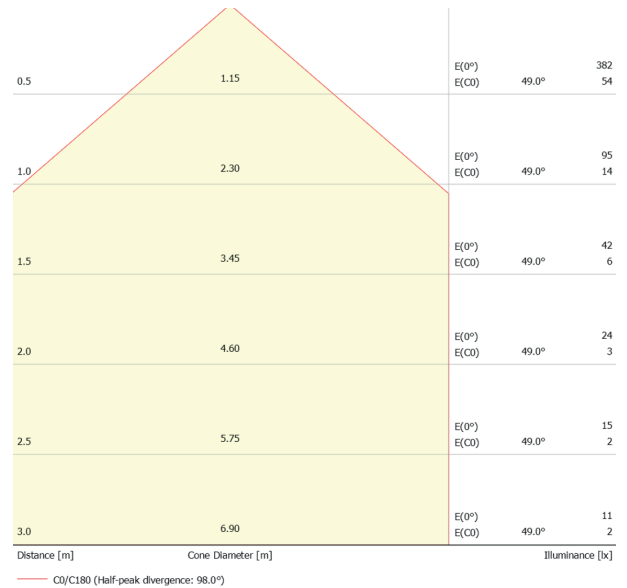

UGR

Glare evaluation according to UGR

ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewing direction at right angles					Viewing direction parallel				
X	Y										
2H	2H	20.1	21.2	20.4	21.4	21.6	20.1	21.2	20.4	21.4	21.6
2H	3H	20.2	21.2	20.6	21.5	21.8	20.2	21.2	20.6	21.5	21.8
2H	4H	20.3	21.2	20.6	21.5	21.8	20.3	21.2	20.6	21.5	21.8
2H	6H	20.3	21.1	20.6	21.4	21.7	20.3	21.1	20.6	21.4	21.7
2H	8H	20.3	21.1	20.6	21.4	21.7	20.3	21.1	20.6	21.4	21.7
2H	12H	20.3	21.1	20.6	21.4	21.7	20.3	21.1	20.6	21.4	21.7
4H	2H	20.3	21.2	20.6	21.5	21.7	20.3	21.2	20.6	21.5	21.7
4H	3H	20.5	21.3	20.9	21.6	21.9	20.5	21.3	20.9	21.6	21.9
4H	4H	20.6	21.2	21.0	21.6	21.9	20.6	21.2	21.0	21.6	21.9
4H	6H	20.6	21.2	21.0	21.6	22.0	20.6	21.2	21.0	21.6	22.0
4H	8H	20.6	21.2	21.1	21.6	22.0	20.6	21.2	21.1	21.6	22.0
4H	12H	20.7	21.1	21.1	21.5	22.0	20.7	21.1	21.1	21.5	22.0
8H	4H	20.5	21.1	21.0	21.5	21.9	20.5	21.1	21.0	21.5	21.9
8H	6H	20.6	21.1	21.1	21.5	22.0	20.6	21.1	21.1	21.5	22.0
8H	8H	20.7	21.1	21.2	21.5	22.0	20.7	21.1	21.2	21.5	22.0
8H	12H	20.7	21.0	21.2	21.5	22.0	20.7	21.0	21.2	21.5	22.0
12H	4H	20.5	21.0	21.0	21.4	21.8	20.5	21.0	21.0	21.4	21.8
12H	6H	20.6	21.0	21.1	21.5	21.9	20.6	21.0	21.1	21.5	21.9
12H	8H	20.7	21.0	21.2	21.5	22.0	20.7	21.0	21.2	21.5	22.0

Variation of the observer position for the luminaire distance S

S = 1.0H S = 1.5H S = 2.0H	+0.5 / -0.7 +1.0 / -2.1 +2.3 / -4.2	+0.5 / -0.7 +1.0 / -2.1 +2.3 / -4.2
Standard table	BK01	BK01
Correction summand	2.7	2.7

Corrected glare indices referring to 215 lm total luminous flux